

Product & Hook-up Information

Body: Forged Brass with EPDM O-Rings

Supply:

Supply:

Flow Cartridge: Series 300 Stainless Steel
Wear Surfaces with Stainless
Steel Spring





Ball Valve
20 Mesh Strainer
Drain Valve with hose End & Cap
Pressure/Temperature Port
Union Connection to Coil

Union Connection to Coil
Pressure/Temperature Port
Manual Air Vent
Union Connection from Control Valve
Automatic Flow Regulator
Dual Pressure/Temperature Ports
Ball Valve







Accuracy: ±5%

Rating: 400 psig at 250° F (2758 kPa at 120° C)







HU Models

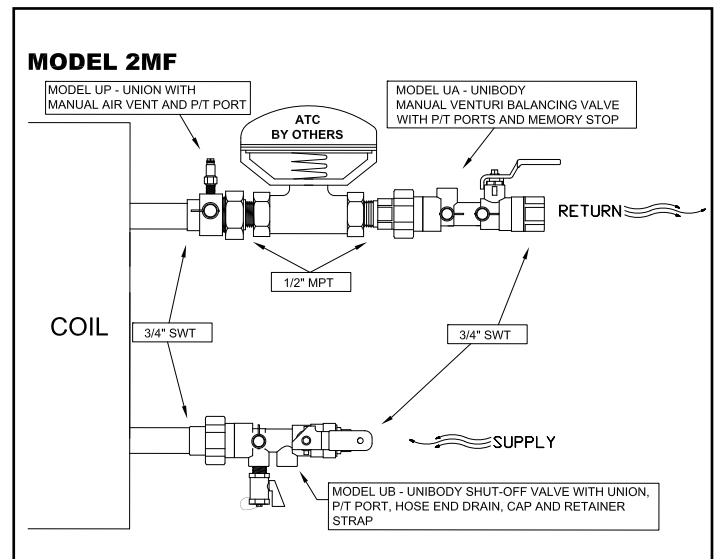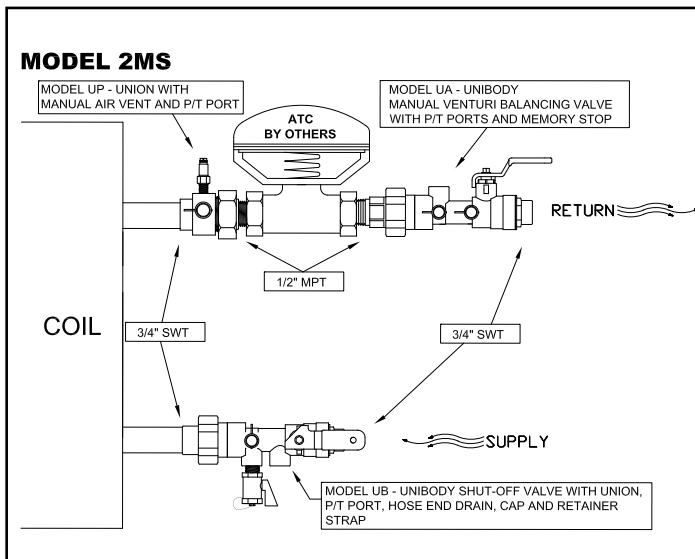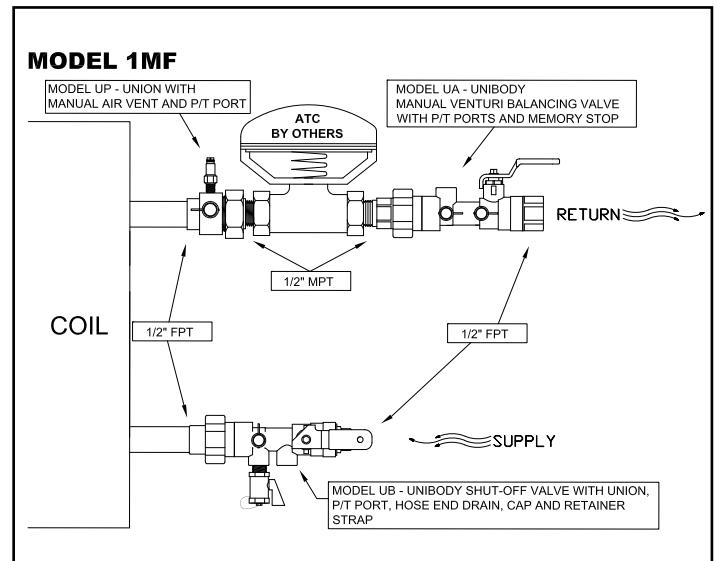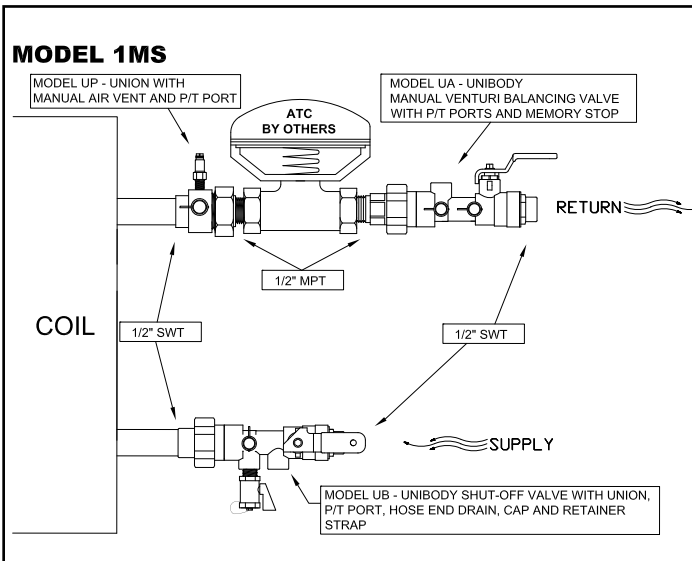





HU-M Models

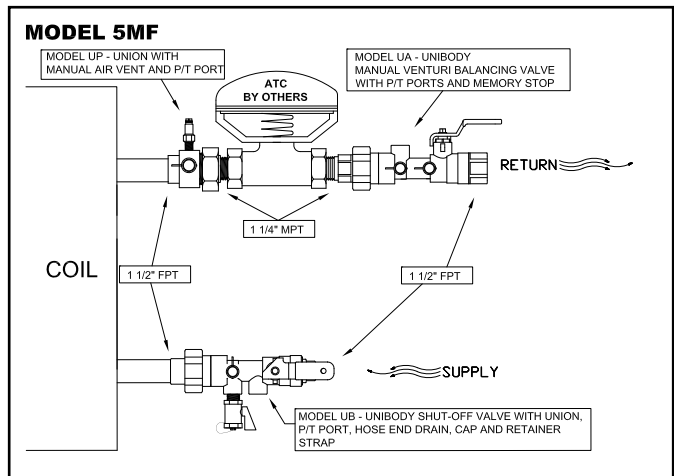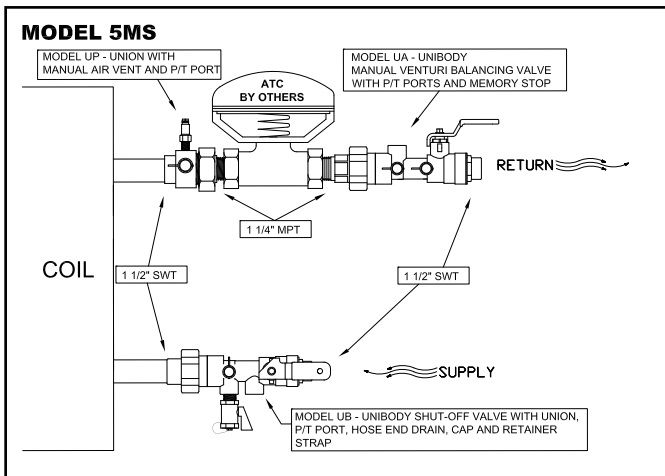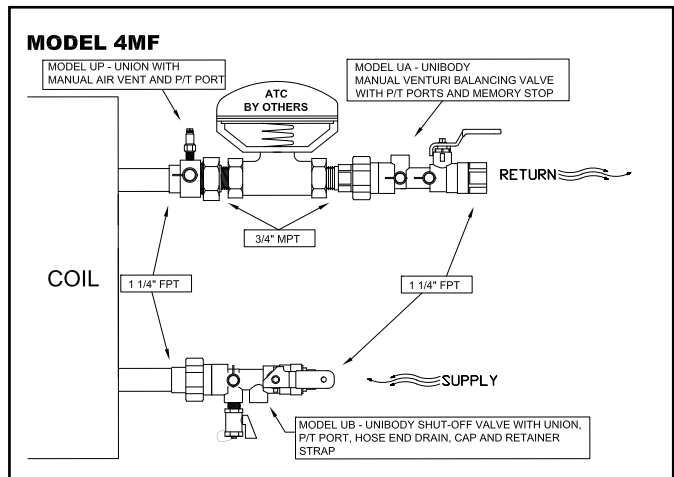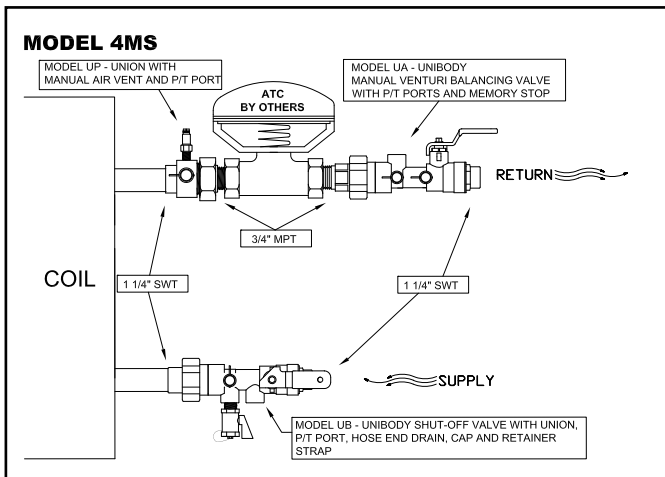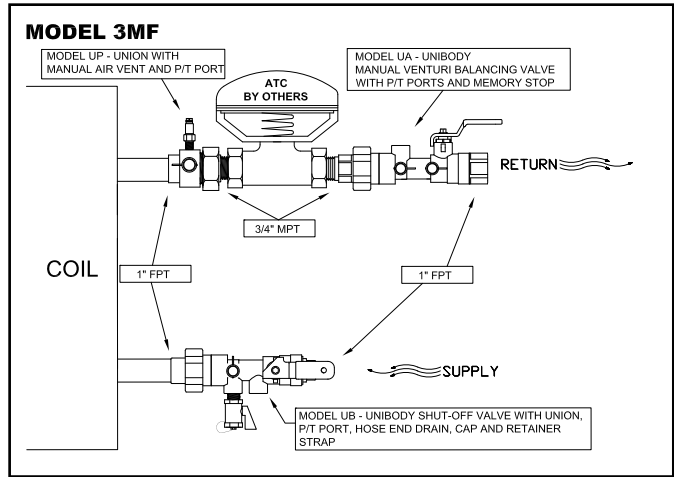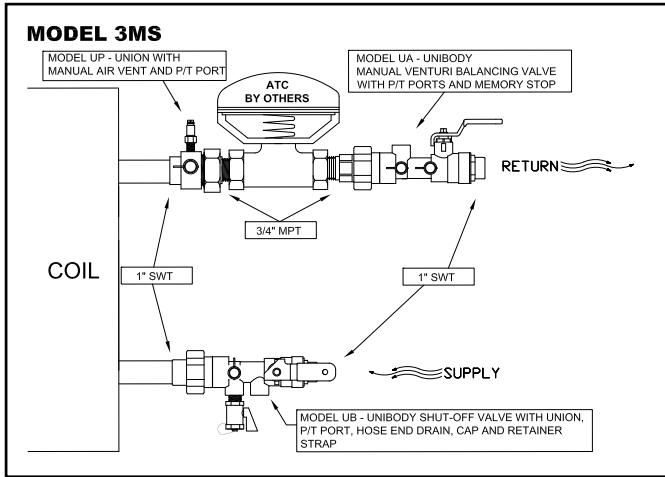

HU-M Models

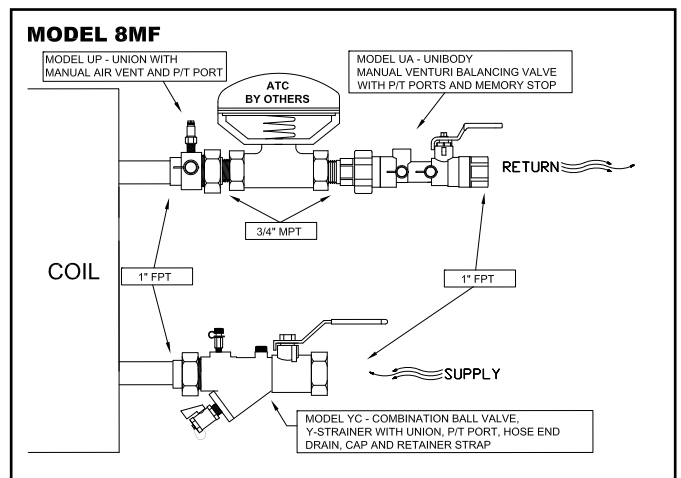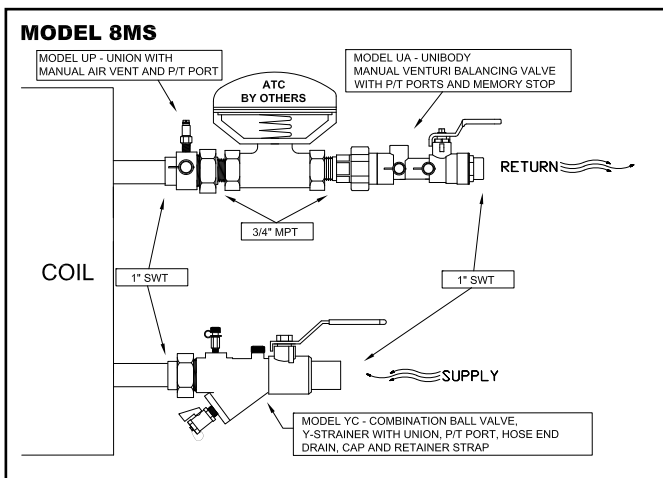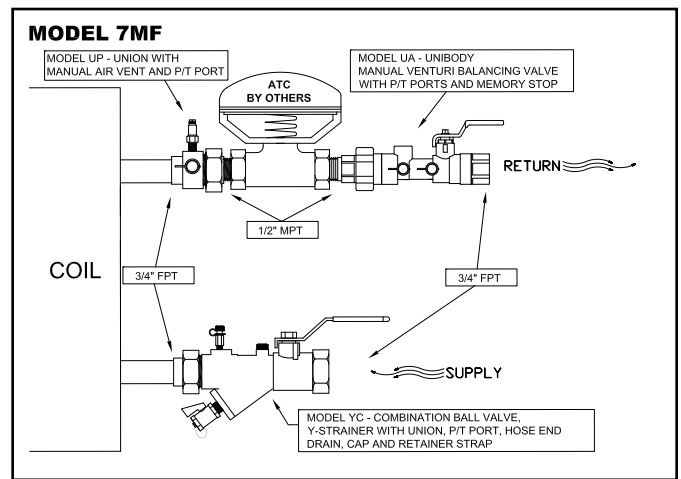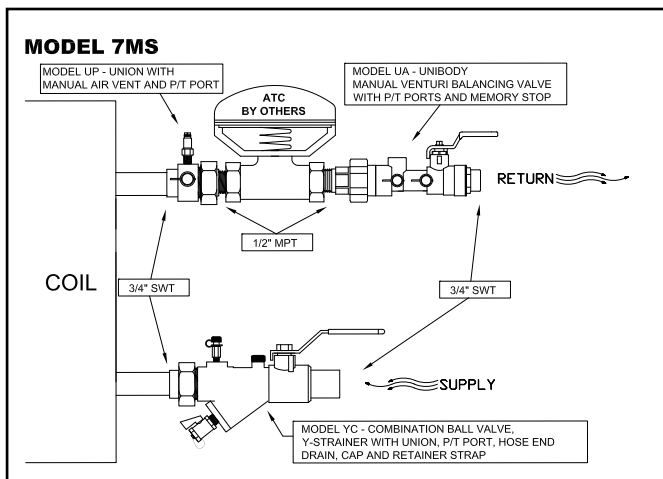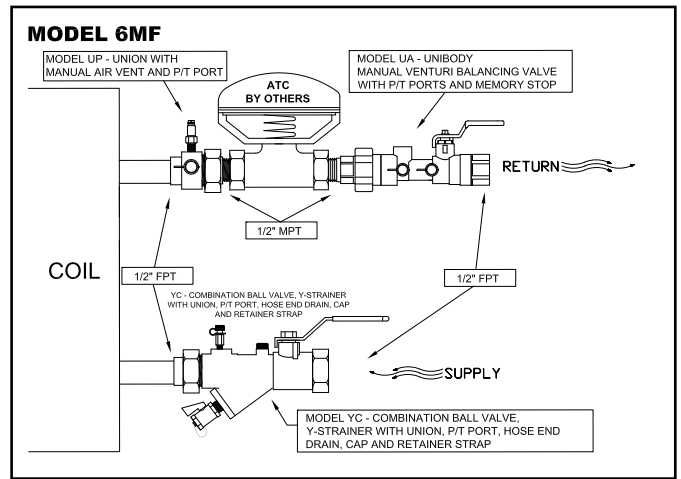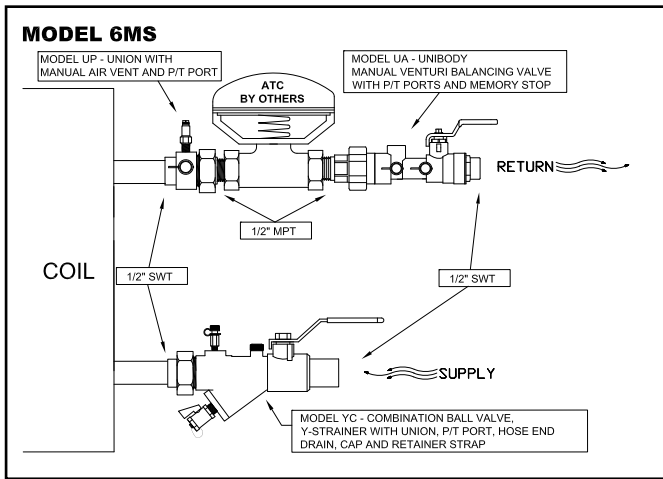

HU-M Models

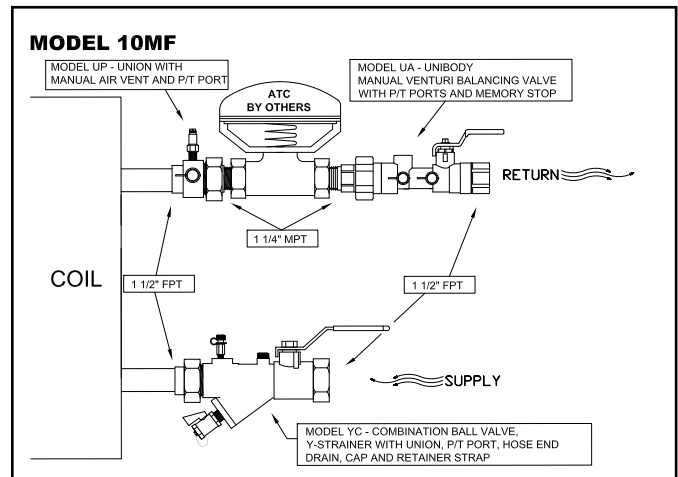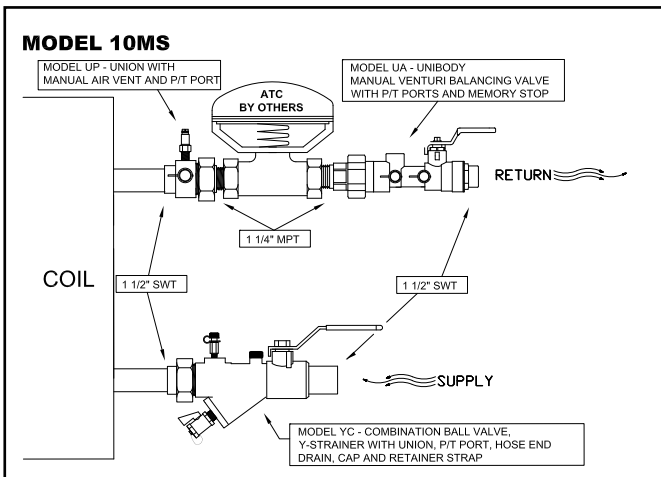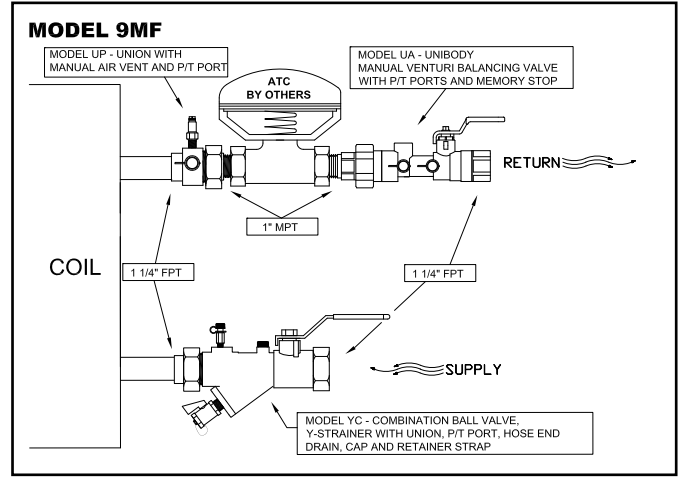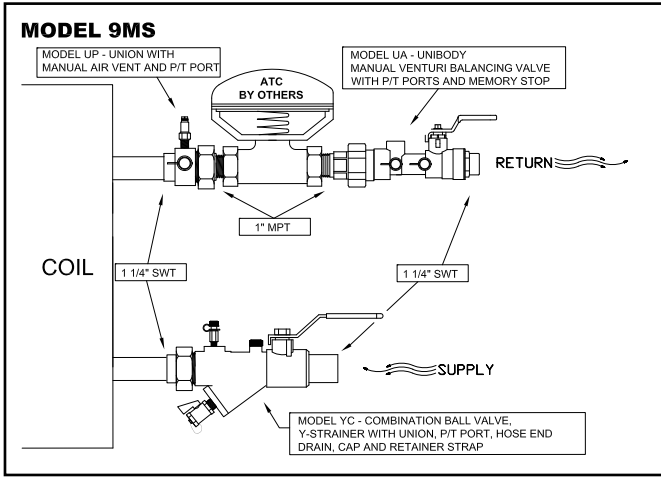

Program

Complete coil hook-up packages are shipped within three days of ordering in a tagged plastic bag and balancing valves are tagged with flow data.

Please do not combine complete coil hook-up package purchase orders with standard or QuickShip purchase orders.

No changes are allowed to the product mix, accessories, flows or configuration; standard orders will be processed if changes are required.

Maximum order is 300 hook-ups without factory consultation. Please contact factory for quantities exceeding the maximum.

Model Order Designation

Model Name

Use on all hook-up packages

Flow Rate

Use to designate flow rate
Rate shown in gpm

HU - 1M - V#1

Package Configuration

Use Use to show hook-up model number

FS = female sweat **MS** = male sweat **FT** = female thread **MT** = male thread

Notes

Pricing includes "Bag & Tag"

HU-MS - Sweat Connection

HU-MF - Female Pipe Thread Connection

Disclaimer: The products, texts, photographs, graphics and diagrams in this submittal may be subject to alteration by Flow Design Inc. without prior notice or reason being given.

